




PATANJALI
Anant Urja Srot...

LED Street Light Brochure

PRODUCT DRAWING

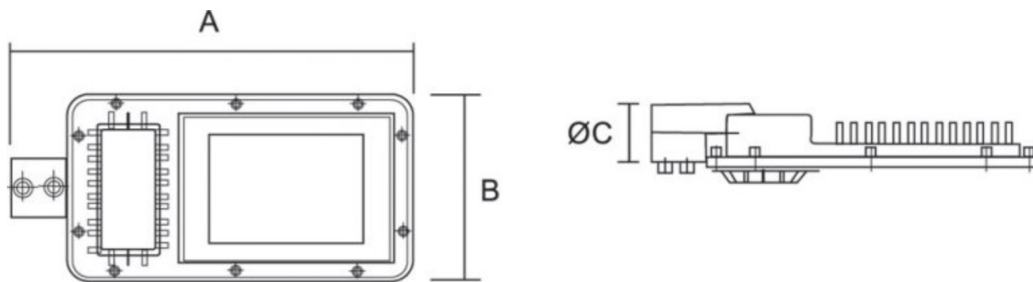

Technical Specifications

WATTAGE	RATED VOLTAGE	LUMEN EFFICACY	THD	PF	CRI	DIMENSION (MM)		
						A	B	C
30W	220 -240 VAC,50Hz	>100lm/W	<10%	>0.95	>70	390	175	90
36W	220 -240 VAC,50Hz	>100lm/W	<10%	>0.95	>70	390	175	90
45W	220 -240 VAC,50Hz	>100lm/W	<10%	>0.95	>70	390	175	90
60W	220 -240 VAC,50Hz	>100lm/W	<10%	>0.95	>70	390	175	90
65W	220 -240 VAC,50Hz	>100lm/W	<10%	>0.95	>70	390	175	90
72W	220 -240 VAC,50Hz	>100lm/W	<10%	>0.95	>70	390	175	90
80W	220 -240 VAC,50Hz	>100lm/W	<10%	>0.95	>70	520	240	85
100W	220 -240 VAC,50Hz	>100lm/W	<10%	>0.95	>70	520	240	85
110W	220 -240 VAC,50Hz	>100lm/W	<10%	>0.95	>70	520	240	85
120W	220 -240 VAC,50Hz	>100lm/W	<10%	>0.95	>70	520	240	85

Dimension tolerance:- ± 5mm

Dimension tolerance: ± 5mm

Patanjali Renewable Energy | Anant Urja Srot...